


Leeco Alter 12/14

The 110 better to engines and reliability and After Off-High Nickel/ operati duty an 3-8 die

Feat

- 160 ide truc
- Fixe
- Rep
- Re al
- De of
- De thr ov
- So co dic
- Ex id sp
- La in su te

OUTPUT AMPS


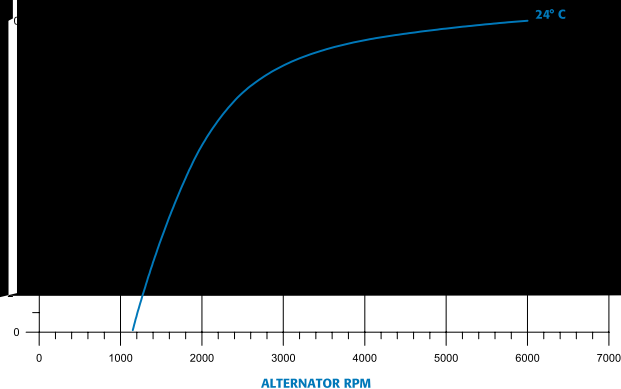


Maximum Continuous Speed - 8000 rpm
Stabilized Output @ 24° C

and Pad mount

J-180 Mount Dimensions

(dimensions in inches)

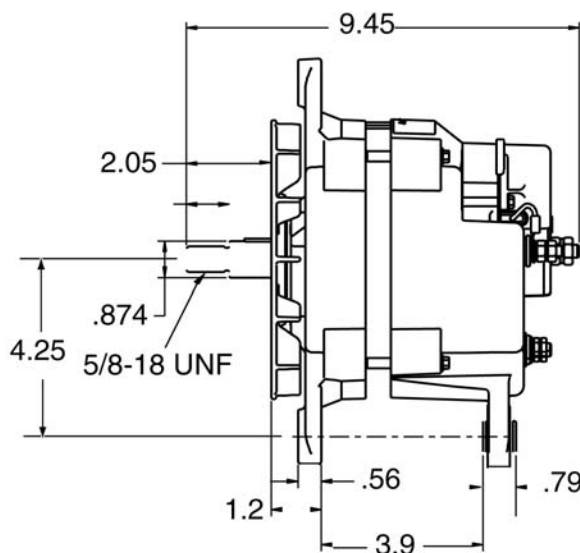
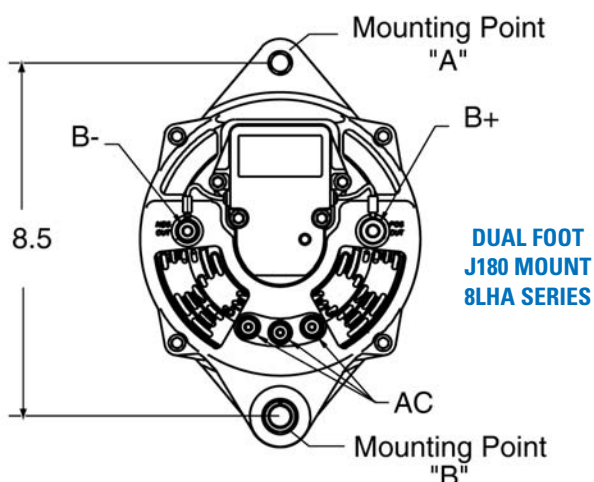


Specifications

		12 VOLT	
DUAL FOOT J180 Mount	Model No.	A	8LHA2070VE
	Sales No.		110-555JHO
4 POINT Pad Mount	Model No.	B	8LHP2170E
	Sales No.		110-555PHO
Output, Stabilized:	5000 RPM	C	160
	1800 RPM	D	78
Temperature Range		E	-40 C to 105 C
Rotation Direction		F	Bi- Directional
Max. Continuous RPM		G	8000
Excitation Type		H	Self Excite
Lamp Circuit Capacity		I	-
Ground		J	Isolated
Regulator Set Points		K	14.2 volts
Voltage Adjustment Range		L	NA
Bearing, Front		M	6305
Bearing, Rear		N	6205
Pulley Ratio Range		O	2:1 to 3:1
Weight (lbs)		P	19.0
J 180 Mounting: A		Q	1/2"-13NC
(see outline) B		R	.515" dia.
Pad Mount: 'A' Front (2)		S	.42"
'B' Rear (2)		T	.48"
Terminal Size:		See drawing for exact use and location	
B+		U	5/16"-24
B-		V	1/4"-28
AC Tap / R Pin		W	10-24

Pad Mount Dimensions

(dimensions in inches)

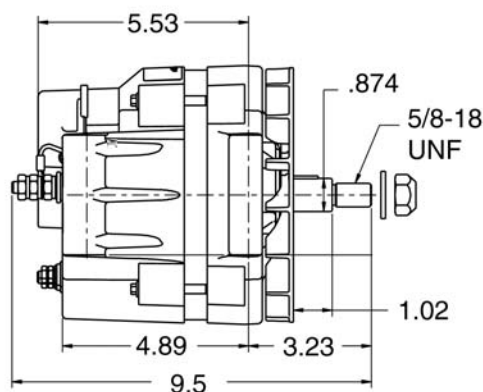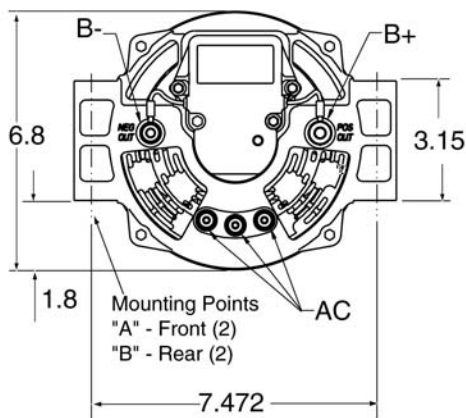

MANUFACTURING & OE SALES LEECE-NEVILLE HEAVY DUTY SYSTEMS

400 Main Street
Arcade, NY 14009
(585) 492-1700
Fax: (585) 492-1660

QS9000 Certified
www.prestolite.com

AFTERMARKET SALES LEECE-NEVILLE

7585 Empire Drive
Florence, KY 41042
(800) 354-0560
(859) 525-8801
Fax: (800) 997-6202